



# atos®

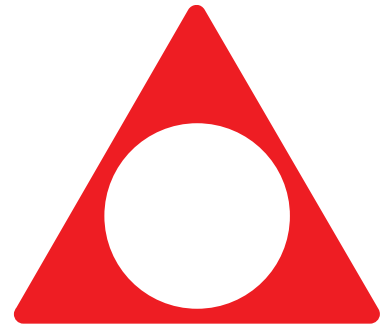

**Distributed by Lynch Fluid Controls Inc.**

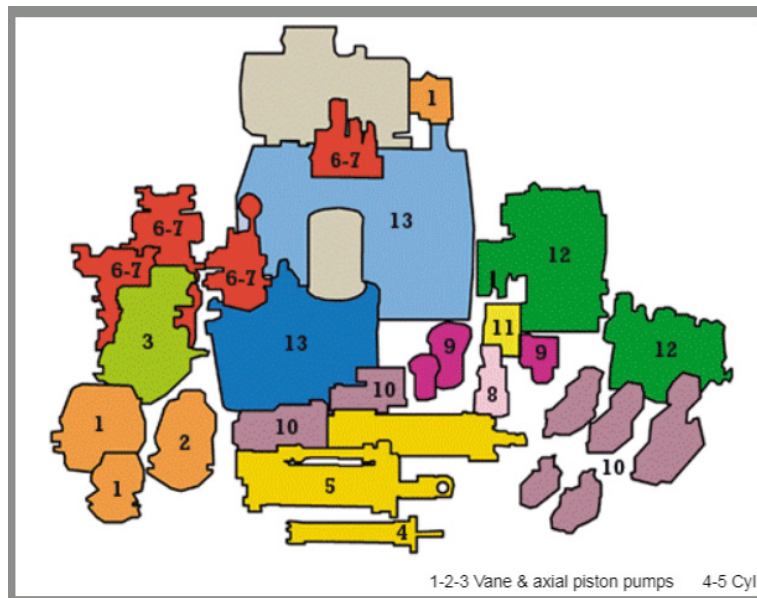

---

**Toll Free**  
Tel: 1 (888) 626-4365  
Fax: 1 (800) 263-5807

**Local & International**  
Tel: +1 (905) 363-2400  
Fax: +1 (905) 363-1191

**Canada (Headquarters)**  
1799 Argentia Road  
Mississauga, Ontario L5N 3A2

**USA**  
3790 Commerce Court, Suite 500,  
North Tonawanda, NY, 14120

## On-Off Directional Controls

Technical information		Size	Max Flow 1/min	Table
Generality	user's guidelines for solenoid valves			<a href="#">E001</a>
<b>Standard Solenoid Valves</b>				
DHI	Flanged solenoid, direct operated, spool type	06	60	<a href="#">E010</a>
DHE	Threaded solenoids, Direct operated, spool type	06	80	<a href="#">E015</a>
DKE	Threaded solenoids, Direct operated, spool type	10	150	<a href="#">E025</a>
DLEH DLEHM	Threaded solenoids, Direct operated, poppet type, leak free	06	12 30	<a href="#">E045</a>
DPH*-1 DPH*-2 DPH*-3 DPH*-6	Double stage, spool type Flanged or threaded solenoids	10 16 25 32	160 300 700 1000	<a href="#">E085</a>
<b>Special Executions Solenoid Valves</b>				
Hand lever	Emergency hand lever devices for solenoid valves, on-off and proportional			<a href="#">E138</a>
<b>Mechanical, Hydraulic, Pneumatic Operated Valves</b>				
DH-00, DH-01, DH-02	Mechanical, hand lever or cam operated valves ISO 4401 subplate mounting	06	50	<a href="#">E150</a>
DK-10, DK-11, DK-12		10	100 140	
DP-20, DP-21, DP-40, DP-41		16, 25	300 650	
DH-04,-05 DK-14,-15 DP-24, -25 DP-44, -45 DP-64, -65	Hydraulic operated valves, single and double stage ISO 4401 subplate mounting	06 10 16 25 32	50 160 300 700 1000	<a href="#">E225</a>
DH-08,-09 DK-18,-19 DPH-28,-29 DPH-48,-49 DPH-68, -69	Pneumatic operated valves, single and double stage ISO 4401 subplate mounting	06 10 16 25 32	50 160 300 700 1000	<a href="#">E255</a>